



## RESTRICTOR STAYS

### TYPE

PERMANENT STANDARD DUTY  
RESTRICTOR

### BENEFIT

Permanent restriction tested to  
BS6375: 2


#### STANDARD DUTY RESTRICTOR STAYS

The Standard Duty Restrictor Stays give an opportunity to permanently restrict opening vents, particularly useful in applications where resident safety is required or where windows open out onto corridors or gangways.

In normal operation the restrictor stay allows the vent to open until the slider engages against the opening stop in the track.

- Tested to BS6375: 2 to withstand a force of 350N for one minute
- Device provides additional friction for windows
- Available in ferritic 430\* stainless steel
- 10 year guarantee (details available upon request)

The Standard Duty Restrictor Stays are designed to be fitted between two flat and parallel rigid faces that conform to the measurements shown below.

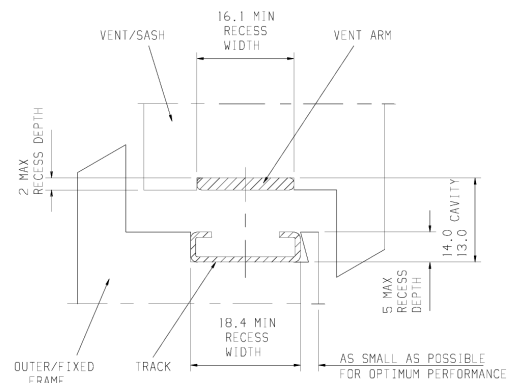

**10**  
YEAR GUARANTEE



BS EN 1509001  
Cert No. Q05105

Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request

Ref: RSSD

\* Standard ferritic (was 430) stainless steel to BS EN 10088-2 Grade 1.4016

## Securistyle

Kingsmead Industrial Estate, Princess Elizabeth Way  
Cheltenham, Gloucestershire GL51 7RE, UK

Rev 6 – Jan 2014 - ©

Tel: +44 (0) 1242 221200

Fax: +44 (0) 1242 228194/520828

E-mail: [info@securistyle.co.uk](mailto:info@securistyle.co.uk)  
Website: [www.securistyle.co.uk](http://www.securistyle.co.uk)